




Portable Seatbelts for Motorcoaches  
as well as other forms of transportation

# Instructions for Installing the Safe Harness

The Safe Harness should be typically installed with the locking plate between the seat backs. Although in some cases because of variations in seats, the Safe Harness may be installed with the locking plate on the outside of the seat back, for ease of installation.

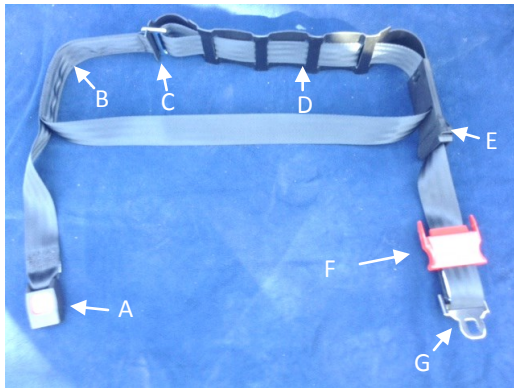

## Parts Identification

- A: Female Buckle
- B: Flexible Corner Finder
- C: Silver Tri Glide Ring
- D: Back Belt Guide
- E: Black Locking Plate
- F: Red Locking Wedge
- G: Male Buckle




## Step 1

Remove Safe Harness from bag. Grasp Flexible Corner Finder "B" with left hand and the Black Locking Plate "E" in right hand. Place over seat back and slide all the way down to the seat cushion.



## Step 2

To secure the Safe Harness to the seat back, take the Female Buckle "A" in your left hand and grasp the belt extending from the Black Locking Plate "E" in your right hand. Snug the belt to the seat back by making short alternating pulls from right to left until snug on the seat back.

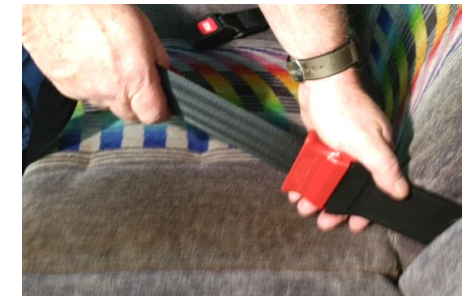

## Step 3

Hold the Male Buckle "G" in one hand and the Red Locking Wedge "F" in the other hand and slide down until it firmly snaps into the Black Locking Plate "E". To ensure the Safe Harness is snug to the seat back hold the Red Locking Wedge "F" in one hand and pull snug on belt to remove any slack.


Instructions continued on the back




Portable Seatbelts for Motorcoaches  
as well as other forms of transportation

# Instructions for Installing the Safe Harness

## Continued:

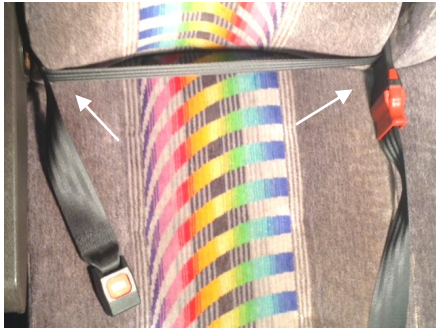

Safe Harness correctly installed on seat.

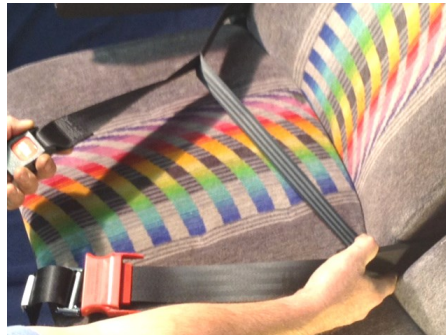

Step 5

Removal of Safe Harness: Unbuckle the belt from around you. Slide Male Buckle "G" to the end of the belt. Release Red Locking Wedge "F" by depressing both tabs and slide out to the end of the belt at the Male Buckle "G". Hold Black Locking Plate "E" in one hand and with the other hand pull the Female Buckle "A" to create enough slack to lift off seat.



Step 6

To return Safe Harness to its full open position, take The Flexible Corner Finder "B" in one hand and the Black Locking Plate "E" in the other hand and pull belt open while rocking hands in and out.

Fold belt together and return to the bag.



Step 4

Sit down and buckle up. Pull belt end to snug belt around you.

The Safe Harness fits most seats!